








Manual boom sprayer coupled to small tractors for total area applications.

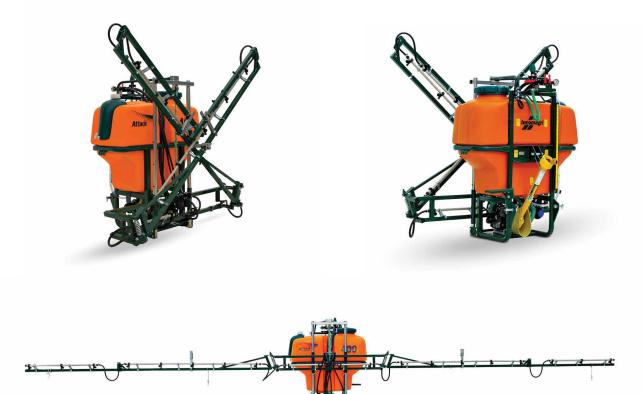

TECHNICAL SPECIFICATIONS					
Model		Attack 400/600X			
Tank		Capacities de 400, 600 (made of polyethylene with U.V protection)			
Boom lenght		10 to 12m			
Boom sytem		Manual			
Working height		0,5 to 1,30 m			
Nozzles		Single with anti dripping valve			
Space between nozzles		50 cm			
Spraying tips		Flat 110-02			
Pump		BMIN 85 - Diaphragm pump with cast aluminiun housing Flow 85 I/min at 540 rpm Max. Pressure 20 bar			
Spraying manifold valve		2 sections standart			
Agitator		Hydraulic by return			
Hands Cleaner tank		15 I (Polyethylene)			
Filters		Suction filter (50 mesh) / line filter (80 mesh) Nozzle filter (100 mesh)			
Loading		Ecological suction (851/min) or by gravity			
Weight and dimensions	Attack 400 x 10m	Attack 400 x 12m	Attack 600 x 10m	Attack 600 x 12m	
Lenght (m)	1,3	1,3	1,3	1,3	
Height (m)	2,2	2,2	2,3	2,3	
Width (m)	1,9	1,9	2,2	2,2	
Weight (kg)	220	226	261	267	

*Weight and dimensions may vary depending on the product version. Project changes may occur without prior notice.

*Merely illustrative images



Rod. Estadual SP-147, 41 - 13.974-905 - Itapira/SP incomagri@incomagri.com.br



(19) 3843-9900

www.incomagri.com.br