


MANUAL BOOM SPRAYER

ATTACK 400/600/800AM





The manual boom sprayer Attack is ideal for crops in the open field for applications in total area.

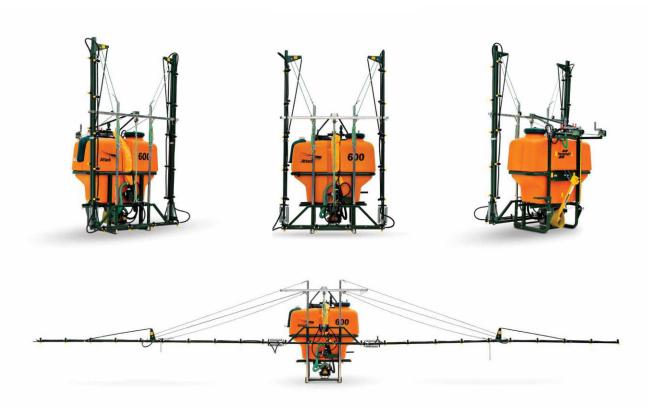

TECHNICAL SPECIFICATIONS						
Model	Attack 400/600/800 AM 10/12/14					
Tank	Capabilities de 400, 600 e 8001 (Made of Virgin Polyethylene with U.V protection)					
Boom lenght	10/12/14 m					
Boom sytem	Manual activated by reels					
Working height	0,5 a 1,80 metros					
Nozzles	Single with anti dripping valve					
Space between nozzles	50 cm					
Spraying tips	Flat 110-02					
Pump	BMIN 85 - Diaphragm pump with cast aluminiun housing Flow 85 I/min at 540 rpm Max. Pressure 20 bar					
Spraying manifold valve	2 or 4 sections, standart or CCP (calibrated return)					
Agitator	Hydraulic by return					
Hands Cleaner tank	15 I (Polyethylene)					
Filters	Suction filter (50 mesh) / Line filter (80 mesh) Nozzle filter (100 mesh)					
Loading	Ecological suction (85I/min) or by gravity					
Weight and dimensions	Attack 400 AM 10	Attack 400 AM 12	Attack 600 AM 12	Attack 600 AM 14	Attack 800 AM 12	Attack 800 AM 14
Lenght (m)	1,52	1,52	0,85	0,85	0,85	0,85
Height (m)	2,64	2,64	2,8	3,3	2,8	3,3
Width (m)	1,8	1,75	1,6	1,6	1,6	1,6
Weight (kg)	235	238	450	465	450	465

*Weight and dimensions may vary depending on the product version.

Project changes may occur without prior notice

*Merely illustrative images



Rod. Estadual SP-147, 41 - 13.974-905 - Itapira/SP incomagri@incomagri.com.br

(19) 3843-9900

